




LAMINATE DOOR
COLLECTION



DOOR
CATALOGUE

2025 EDITION

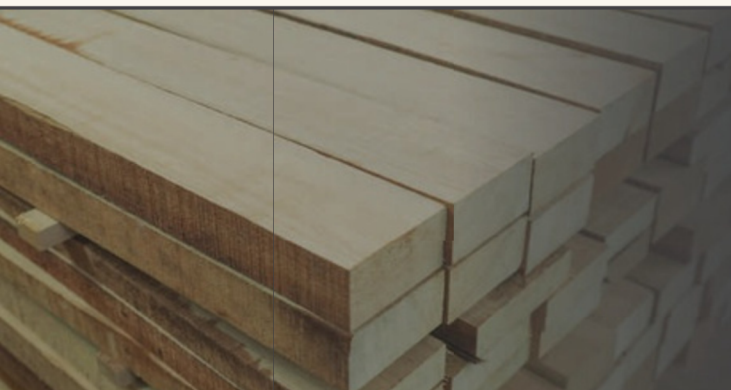

SOURCE

Softwood & hardwood available abundantly in Indonesia

PERFORMANCE TESTING

50.000 open-close cycle test



ENGINEERED CONSTRUCTION

Resulting in more stable door and minimal expansion & contraction

- ✓ **Particle Board**
Solid Wood feel at aordable cost.
- ✓ **Falcata Board**
Lightweight full solid engineering core.
- ✓ **Semi Solid**
Maximum material e ciency with maximum performance.
- ✓ **Honeycomb**
Econominal options with high quality and stability of the door.

LAMINATE OPTIONS

TYPE

PVC

Polyvinyl Chloride

- Wide variety of design options
- High flexibility to be used for profiles
- Economical options with variety options of designs

CPL

Continuous Pressed Laminated

- Paintable with another layer of coating
- Natural wood appearance
- FSC options available

HPL

High Pressure Laminates

- High Scratch Resistance
- Good durability against liquid and moisture
- Less maintenance needed

Synchronized

HPL

Synchronized High Pressure Laminates

- Realistic natural wood texture
- Matching printing and graining
- Removing the impression of artificial wood

LAMINATE DOOR

JOINERY



Metro



1L Mexicano



1L Monaco



1L Daytona



1 L



1P



4L



4P

LAMINATE DOOR


FLUSH



Mexicano




Monaco

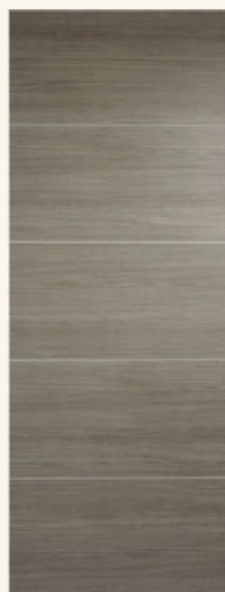

Iseo



1L Slimline

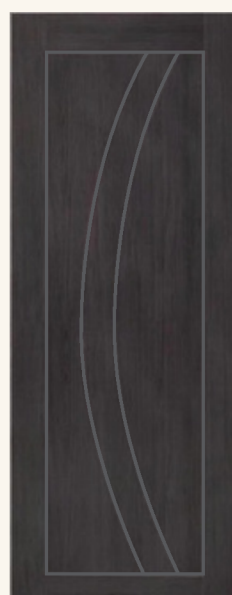


Metro



Westwood



Daytona

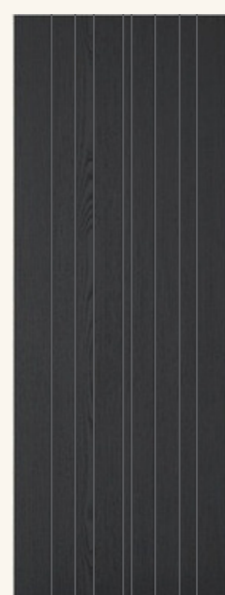

Montreal

LAMINATE DOOR

SLIMLINE



5L HV



5L HB





5P HV




10L


SOLID COLOR

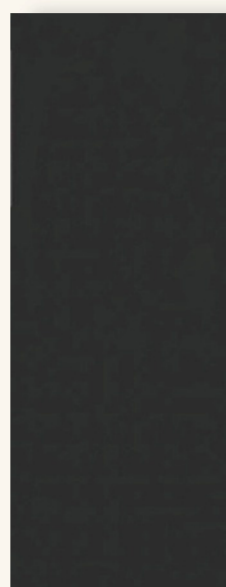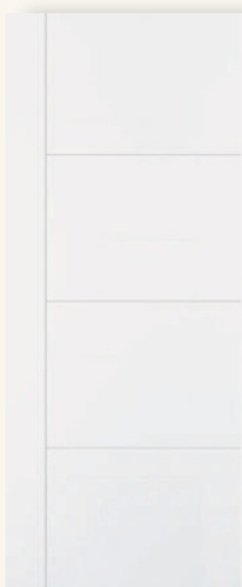

GLASS OPTIONS

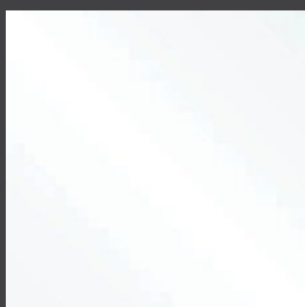


Clear

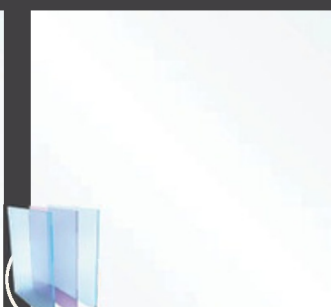

Laminated




Bevel

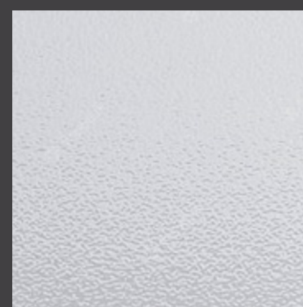


Frosted



Flemish

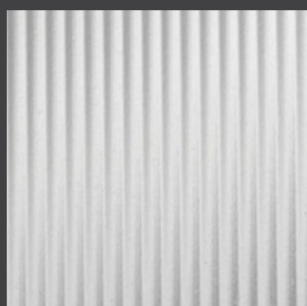

Reeded

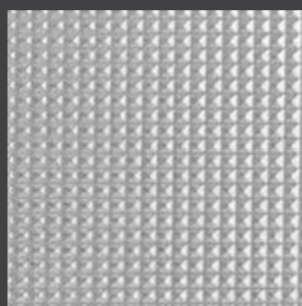

Cross Reeded



SGO

LAMINATE DOOR

SIZE RANGE



PVC & CPL Size Range

Thickness : 35 - 60 mm

Width : 300 - 1200 mm

Height : 1200 - 3000 mm

HPL & Synchronized HPL Size Range

Thickness : 35 - 60 mm

Width : 300 - 1200 mm

Height : 1200 - 2400 mm

CORE OPTIONS

All with MDF or HMR MDF Skin



Particle
Board



Full Solid
Engineering



Semi Solid
Engineering



Honeycomb

QUALITY



- ✓ Strictly controlled by Japanese manufacturing system.
- ✓ Machine Processed resulting in quality consistent products.
- ✓ Passed 50,000 times open-close cycle test.
- ✓ Centered door, minimal bowing.
- ✓ PUR adhesive to achieve maximum adhesion performance.

CERTIFICATION AVAILABILITY



FSC-certified forests are managed to strict environmental, social and economic standards.

BS 12150-1
EN 12150-1

This European Standard specifies tolerances, flatness, edgework, fragmentation and physical and mechanical characteristics of monolithic flat toughened safety glass for use in residence.

LAMINATE DOOR COLLECTION



MORE INFORMATION:



 www.moontradinggroup.com

 [moontradingasia](https://www.instagram.com/moontradingasia)

 +43 676 5113278